

FOREST

DRAPERY HARDWARE




CCC[®]
Corded Contract System

Product information

- Heavy duty cord operated system, with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Bendable; it can be curved and reversed curved with a 20 cm (8") radius or continuous curve.
- Heavy duty clickable carriers - 10 carriers on a breakaway strip - UV protected.
- Can also be used for Forest Easyfold and accordiafold drapery systems.
- Maximum fabric weight: 8 kg. per mtr (5,3 LBS per ft).
- Colours available: white, silver.
- Track finish: chromated powder coating with a factory applied patented dry lubricant.
- Lengths available: 3.66 m (12'), 4.27 m (14'), 4.88 m (16'), 6.10 m (20').

Profile


- Shown actual size 1:1
- Aluminium Extrusion
- Weight: 300 gram per mtr (3.22 ounce per ft)
- Dimensions: 20 mm x 20 mm (3/4" x 3/4")



For use in

Hotels - motels - offices - healthcare - schools - residential or any location where a heavy duty cord traverse system is required.

Applications

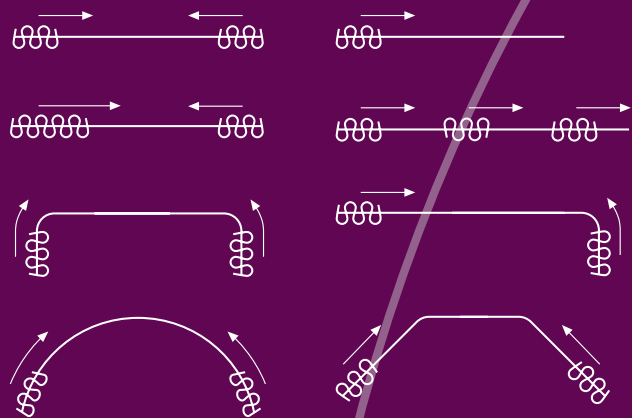


Bending/curving

The track can be curved and reversed curved using a 20 cm (8") radius. Continuous curving can be done with the electric powered bender or by special order from factory.



- ① Carrier
- ② CCS/FMS Master Carrier Underlap
- ③ Traverse cord
- ④ CCS/FMS Master Carrier Overlap
- ⑤ CCS Cord connector
- ⑥ CCS Track
- ⑦ Pulley

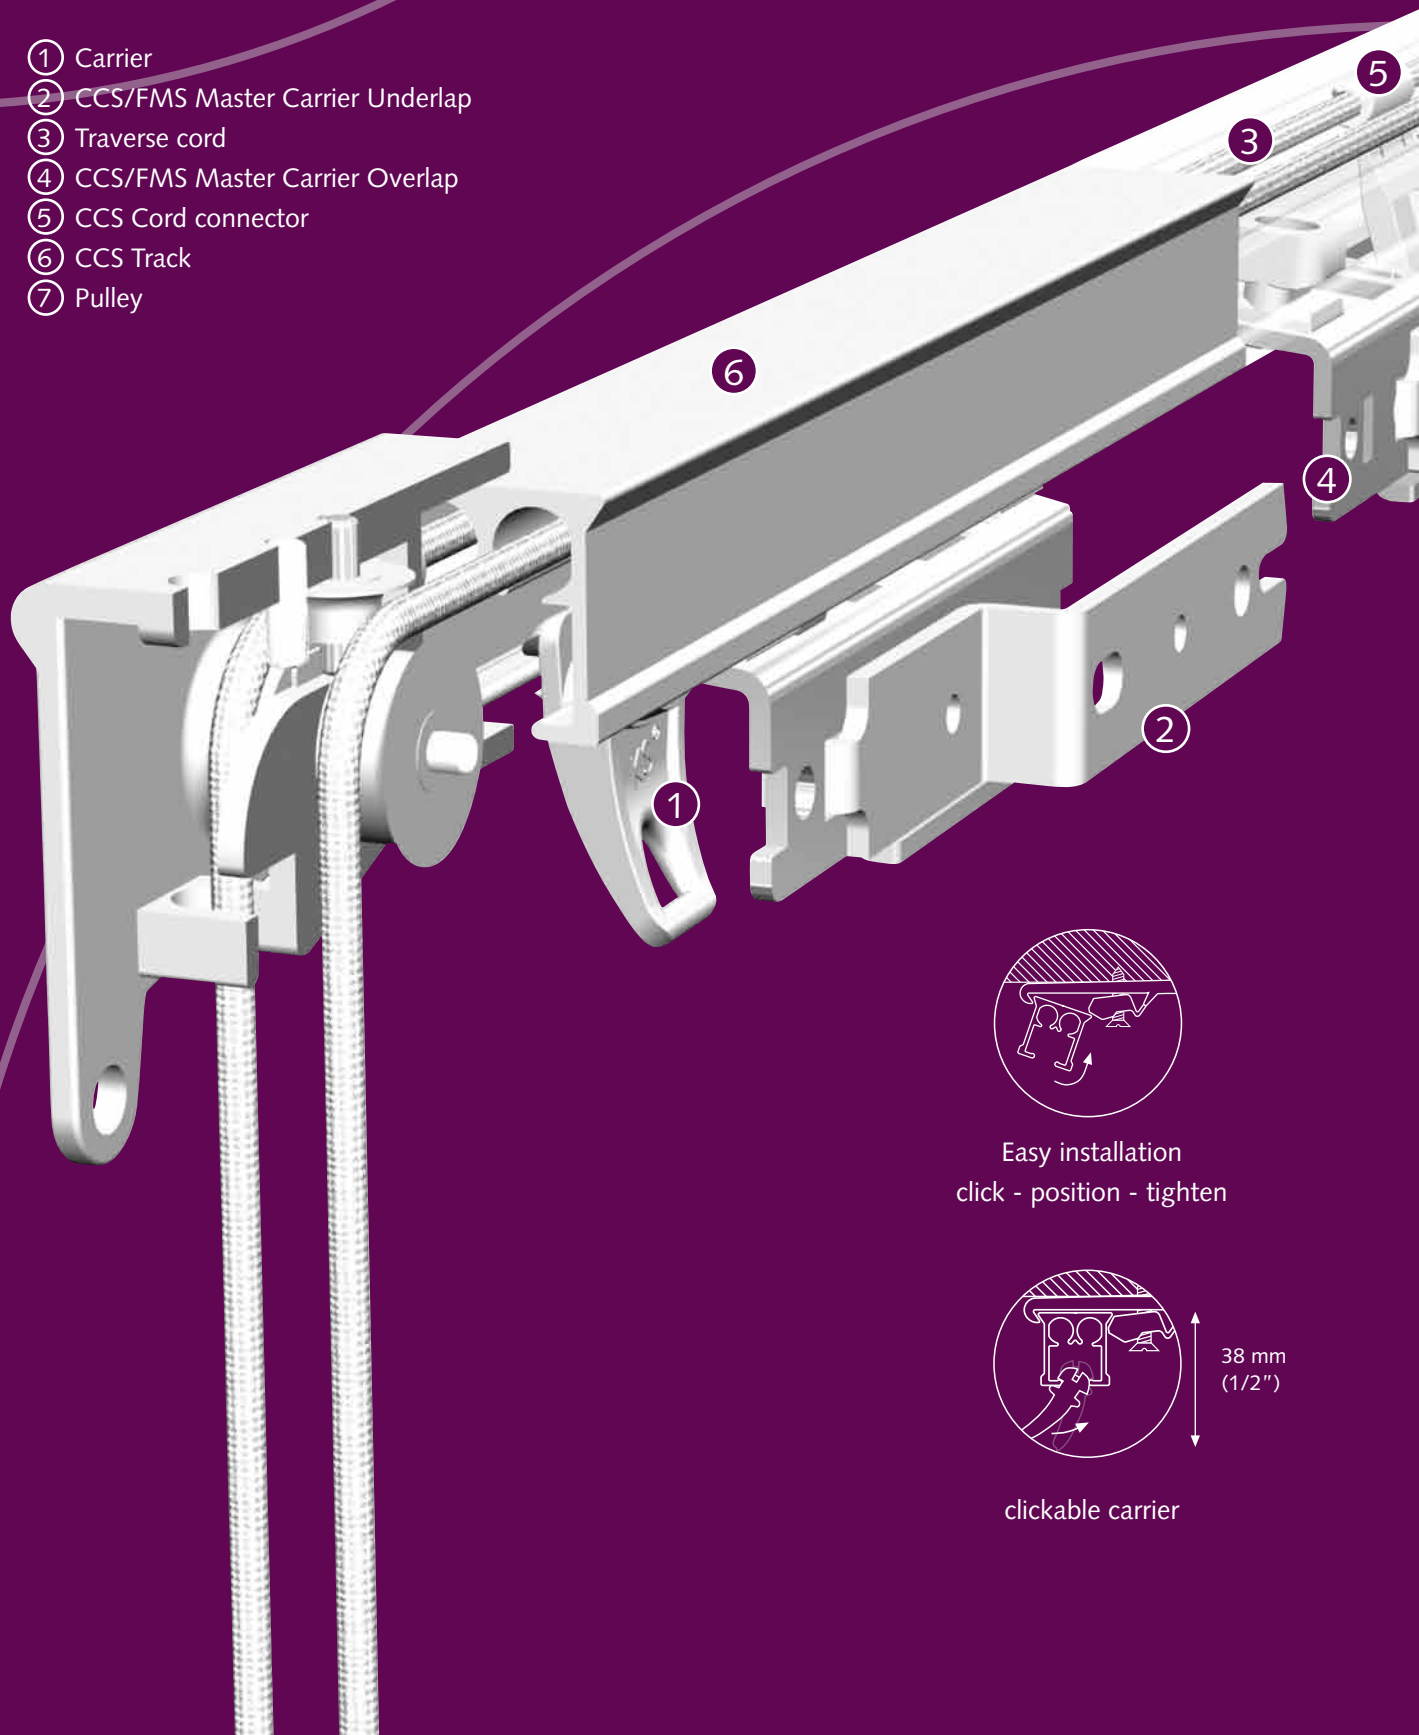


Easy installation
click - position - tighten




38 mm
(1/2")

clickable carrier

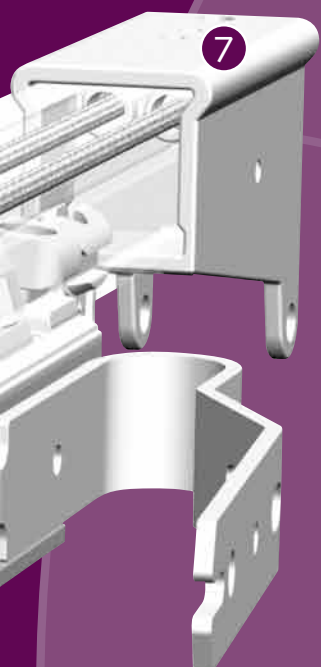

Ceiling bracket



A) Min. 10 cm (4'')



A) Min. 15 cm (6'')




Mounting Brackets

Aluminium Wall Bracket single

A) 7,5 cm (3'') B) 6,3 cm (2'')


A) 10 cm (4'') B) 8,8 cm (3'')

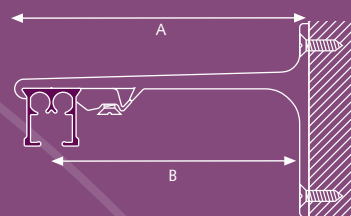

Aluminium Wall Bracket double


A) 15 cm (6'') B) 9,2 cm (3'') C) 4,5 cm (2'')

A) 20 cm (8'') B) 9,2 cm (3'') C) 9,5 cm (4'')

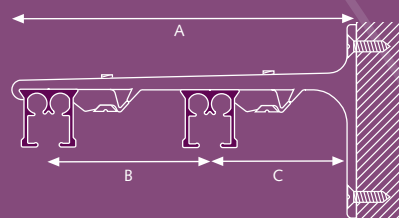


Aluminium Wall Bracket triple

25 cm (10'')

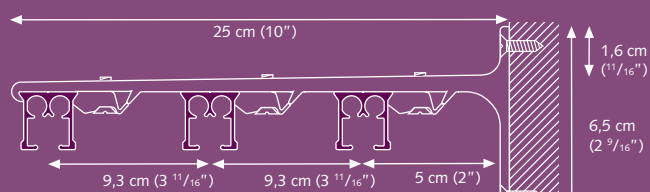

Other brackets are available, see CS brochure.
Brackets need to be placed every 60 cm (24'').

Colours available from stock:
Complete the art.nr. with the indicated colour-code
01 White, 03 Silver, 05 Brown, 06 Black
Other colours can be delivered on request.



CCS Track 30010.. ...cm
10/bundle
Extruded aluminium chromated, powder coated. Factory lubricated for wall or ceiling mounting. Inches 3.66 m. (12"), 4.27 m. (14"), 4.88 m. (16"), 5.8 m. (19"), 6.10 m. (20"). Colours: 01, 03.



Carrier 25101.. 000
250/box
Contract klik carrier patented, clickable. UV-resistant.
Colours: 01, 02, 03, 05, 06.




Silence Carrier 2510301000
250/box
Reduces resonance in the CCS track.
Colours: 01.




CCS Cord Master Carrier R/L Underlap 3015601000
15/box
Multifunctional - reversible arm - will go through curves.
Colours: 01, 03.




CCS Cord Master Carrier R/L Overlap 3015701000
15/box
Multifunctional - reversible arm - will go through curves, will also fit stiffeners and cord connector. Colours: 01, 03.



CCS/FMS Master Carrier R/L Underlap Single 3016001000
15/box
Multifunctional - arm is reversible - will slide trough curves.
Colours: 01.



CCS Cord Connector 3030301000
100/box
Connects cord to the CCS master carrier.
Colours: 01, 03, 05, 06.




Pulley 30301.. 000
25/box
Reversible, for two way draw.
Colours: 01, 03, 05.




End Pulley Small 30302.. 000
25/box
Reversible, for non-stacking side on one way draw.
Colours: 01, 03, 05.



Inside Wall Bracket 3022301000
25/box
For additional support anywhere the pulley meets the wall.



Straight Return R/L 3022501000
10/box
Adjustable from 7,5 cm (3") to 25 cm (10").



Traverse Cord 10304..000
250 mtr/roll
Nylon drapery cord designed for strong smooth slide, Ø 3.5 mm (0,14"), 16 ply.
Colours: 01, 03, 06.




Tension Pulley 1030501000
25/box
Metal.
Colours: 01.



Cord Weight 3030601000
25/box
Plastic.
Colours: 01.




Cord Safety Clip 3645702000
25/box
Plastic.
Colours: 01.




Smart Klick Ceiling Bracket 10182..000
100/box
"Klicks" onto track, powder coated. Install with VK screw 4 mm.
Inclusive Covercap
Colours: 01, 03, 05, 06.



Covercap for Smart Klick Ceiling Bracket 10182..001
100/box
Fits on Smart Klick Wall and Ceiling bracket.
Colours: 01, 03, 05, 06.



Adjustable Wall Bracket 10208..115
100/box
Smart klick, adjustable single from 7,5 cm (3") to 11,5 cm (4.5")
double from 6,5 cm (2,5") to 10 cm (4") - 15 cm (6") to 19,5 cm (7,5")
10208..195
50/box

**Aluminium Wall Bracket**

Smart klick, powder coated.


10203...cm

7,5 cm single	(3")	20/box
10 cm single	(4")	20/box
15 cm double	(6")	15/box
20 cm double	(8")	15/box
25 cm triple	(10")	10/box

Colours: 01, 03.




**Contract Bending tool**

For CS/CCS/FMS/CRS/MTS

2560000000
1/each**Contract Bending Wheel**2561000000
1/each**CCS Bending Strips**

For CCS track, length: 90 cm (35,4") 1/set

8500000002

For CCS electric powered bender.
Length 7 meter (23'). 8500000010
1/each**Bending Standard**Standard for Contract
bending tool2560800000
1/each**Electric Powered Bender**Available in 230V or 115V, to create
continuous curves and arches.
Minimum radius 50 cm (20").1060500000
1/box**Bending Wheels**For Electric Powered Bender.
Complete set of 3 wheels.2560700000
1/set**Electric Powered Railcutter**

230 Volt EU

1061100000

Replacement Blade

For electric powered railcutter.

1061200000
1/each

Distributor:

FOREST

DRAPERY HARDWARE